PRODUCT'S DATA SHEET

Consists of a piece of carbon steel shaped to hold the pipe down to walls or ceilings provided with four standard hex nuts and has a longer straight threaded length



U BOLT WITH LINING

Used to secure piping to structural members. When the piping is below the structural member, the U-Bolt provides vertical support and restricts lateral movement while allowing for axial
movement. When the piping system is above the structural member, the U-Bolt restricts lateral movement and upward movement while allowing axial movement of the piping

Material

Carbon Steel and any other materials can also be provided upon request

FINISH

Plain, Electro-Galvanized, Hot Dip Galvanized or epoxy coating

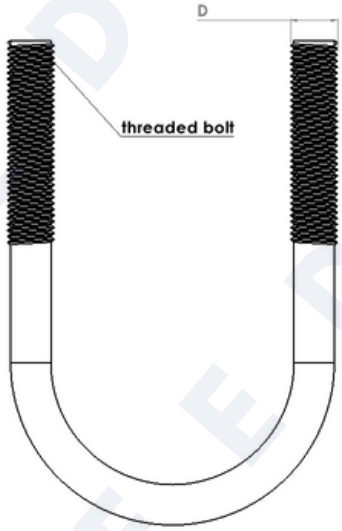

product code	Pipe Size	Pipe Diameter (mm)	D (mm)	max load (KN)
SF-UB 3/4	.75"	30	10	2.2
SF-UB 01	1"	34	10	2.2
SF-UB 01.25	1.25"	41.5	10	5.5
SF-UB 01.5	1.5"	51.5	10	5.5
SF-UB 02	2"	64	10	5.5
SF-UB 02.5	2.5"	75	12	10.5
SF-UB 03	3"	89	12	10.5
SF-UB 04	4"	116	12	42.5
SF-UB 05	5"	144	12	47.9
SF-UB 06	6"	166	12	50
SF-UB 08	8"	226	16	52